


Copper Cable (Bare stranded)

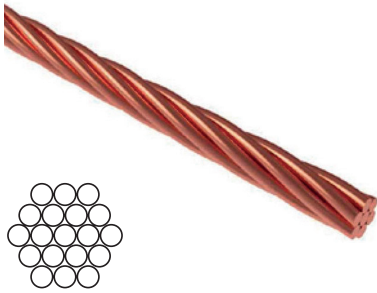

Kingsmill **Copper Cable (Bare stranded)** is suitable for earthing applications.

CSA (mm ²)	STRANDING No./DIA (mm)**	NOMINAL DIAMETER (mm)	WEIGHT (kg/m)	PART NO.
6.0	7 / 1.04	3.12	0.05	BSCW006
16	7 / 1.70	5.10	0.15	BSCW016
25	7 / 2.14	6.42	0.23	BSCW025
35	7 / 2.52	7.56	0.32	BSCW035
50	19 / 1.78	8.90	0.43	BSCW050
70	19 / 2.14	10.70	0.62	BSCW070
95	19 / 2.52	12.60	0.86	BSCW095
120	37 / 2.03	14.21	1.09	BSCW120
150	37 / 2.25	15.75	1.33	BSCW150
185	37 / 2.52	17.64	1.67	BSCW185
240	61 / 2.25	20.25	2.20	BSCW240
300	61 / 2.52	22.68	2.76	BSCW300
400	61 / 2.85	25.65	3.53	BSCW400

Material: Soft drawn stranded copper cable to BS:EN 60228 (can supply hard drawn on request to BS 7884)

Standard: BS:EN 60228