


### Copper Cable (Lead covered stranded)

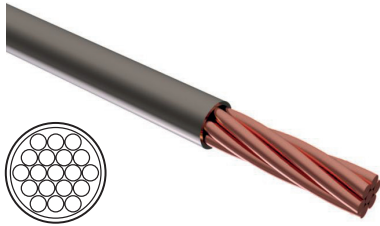

Kingsmill **Copper Cable (Lead covered stranded)** is used in areas where corrosion is an issue.

CSA (mm <sup>2</sup> )	STRANDING NO./DIA. (mm)	NOMINAL DIA. (mm)	WEIGHT (kg/m)	PART NO.
185	37 / 2.52	21.64	1.67	BSCW185/LS
240	61 / 2.25	24.25	2.20	BSCW240/LS
300	61 / 2.52	26.68	2.76	BSCW300/LS
400	61 / 2.85	29.65	3.53	BSCW400/LS

**Material:** Soft drawn stranded copper cable

**Standard:** BS:EN 60228

**Covering:** Type 'B' lead alloy (2mm thick coating)

#### CAN'T SEE A CONDUCTOR THAT MEETS YOUR REQUIREMENTS . . ?

Kingsmill supply a wide range of conductor, including: copper tape, insulated high voltage cable, aluminium tape, solid circular copper, copper covered aluminium, solid circular aluminium, copper cable and galvanised stranded conductor. If none of these meet your requirements, Kingsmill can source other types of conductor eg copper covered steel. Please contact us for details.