

## Flexible Flat Copper Braids


**Flexible Flat Copper Braid (Plain)** is suitable for applications of earth bonding. The braid can also be supplied as standard pre-cut and drilled braid bonds (see page BOND:10).

OVERALL NOMINAL SIZE (mm)	CSA (mm <sup>2</sup> )	WEIGHT (kg/m)	PART NO.
12 x 1.0	6	0.055	FCB1201
15 x 1.5	10	0.096	FCB1515
19 x 2.5	16	0.16	FCB1925
25 x 3.0	25	0.25	FCB2530
25 x 3.5	35	0.34	FCB2535
30 x 5.0	50	0.49	FCB3050
32 x 6.0	70	0.63	FCB3260
37 x 6.0	95	0.93	FCB3760
45 x 6.0	120	1.15	FCB4560
50 x 8.0	150	1.45	FCB5080

**Material:** Copper

**Standard:** BS:EN 13602

**OTHER SIZES, MATERIALS, HOLE SIZES ETC. AVAILABLE ON REQUEST.**

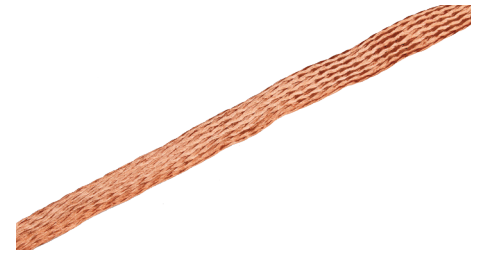

## Flexible Flat Copper Braids (Tinned)

**Flexible Flat Copper Braid (Tinned)** is suitable for applications of earth bonding. The braid can also be supplied as standard pre-cut and drilled braid bonds (see page BOND:10).

OVERALL NOMINAL SIZE (mm)	CSA (mm <sup>2</sup> )	WEIGHT (kg/m)	PART NO.
12 x 1.0	6.0	0.055	FCBT1201
15 x 1.5	10	0.096	FCBT1515
19 x 2.5	16	0.16	FCBT1925
25 x 3.0	25	0.25	FCBT2530
25 x 3.5	35	0.34	FCBT2535
30 x 5.0	50	0.49	FCBT3050
32 x 6.0	70	0.63	FCBT3260
37 x 6.0	95	0.93	FCBT3760
45 x 6.0	120	1.15	FCBT4560
50 x 8.0	150	1.45	FCBT5080

**Material:** Tinned Copper

**Standard:** BS:EN 13602

**OTHER SIZES, MATERIALS, HOLE SIZES ETC. AVAILABLE ON REQUEST.**

