


## Slate Holdfasts (Flat and circular conductor)

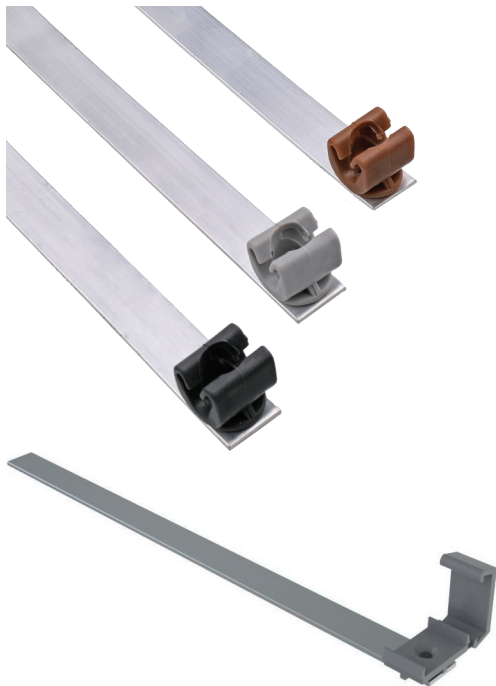

**Slate Holdfasts** are used for the installation of circular conductor tape above the roof tiles without the need for drilling holes.

The aluminium tail slides under the roof tile and is fixed to the wooden beam or tile batten using proprietary galvanised nails. The clip then protrudes from the tile and offers a fixing for the tape.

### For use with circular conductor

CONDUCTOR DIA (mm)	CONDUCTOR TYPE	COLOUR	WEIGHT (kg)	PART No.
8	Bare	Brown	0.05	SHBN08B/PUSH
8	Bare	Grey	0.05	SHGY08B/PUSH
8	PVC covered	Brown	0.05	SHBN08P/PUSH
8	PVC covered	Grey	0.05	SHGY08P/PUSH
8	PVC covered	Black	0.05	SHBL08P/PUSH
8	PVC covered	Stone	0.05	SHST08P/PUSH
8	PVC covered	White	0.05	SHWH08P/PUSH

### For use with flat conductor

CONDUCTOR SIZE (mm)	CONDUCTOR TYPE	COLOUR	WEIGHT (kg)	PART No.
25 x 3	Bare	Brown	0.05	SHBN253B
25 x 3	Bare	Grey	0.05	SHGY253B
25 x 3	PVC	Brown	0.05	SHBN253P
25 x 3	PVC	Grey	0.05	SHGY253P
25 x 3	PVC	Black	0.05	SHBL253P
25 x 3	PVC	Stone	0.05	SHST253P
25 x 3	PVC	Green	0.05	SHGN253P
25 X 3	PVC	White	0.05	SHWH253P

**Material:** Polypropylene clip/Aluminium tape

**Standard:** Aluminium tape to BS:EN 755-5

