


## Horizontal cable to horizontal rebar joint - CRE17

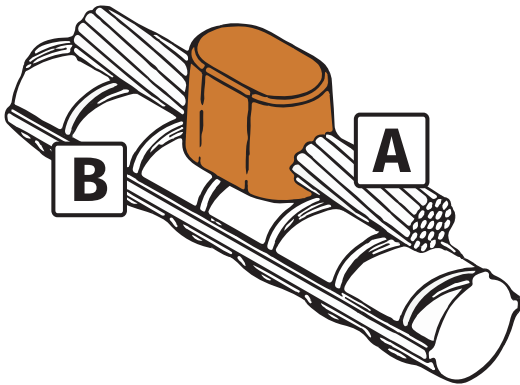

A	B	°	Icon 1	Icon 2	Icon 3
16	10 - 40	D	#045	HCD	MDCRE1716
25	10 - 40	D	#045	HCD	MDCRE1725
35	10 - 40	D	#045	HCD	MDCRE1735
50	10 - 40	D	#090	HCD	MDCRE1750
70	10 - 40	D	#090	HCD	MDCRE1770
95	10 - 40	D	#090	HCD	MDCRE1795
120	10 - 40	D	#090	HCD	MDCRE17120
8 dia	10 - 40	D	#090	HCD	MDCRE178S
10 dia	10 - 40	D	#090	HCD	MDCRE1710S

\*Requires chain clamp and butyl seal

16, 25, 35, 50, 70, 95 and 120 = stranded cable (mm<sup>2</sup>)

8 dia and 10 dia = solid copper/steel