

DATASHEET

PART NO: KM1+2-12.5-1+1 SC

TYPE: Type 1+2 lightning current and surge arrester

DESCRIPTION: Combination of varistor SPD and encapsulated spark gap connected in the 1 + 1 mode. Use in TT system main distribution boards on the boundary of LPZ0 and LPZ1 and sub-distribution boards on the boundary of LPZ1 and LPZ2 (*if >100m away from the MDB*).

Suitable for houses, commercial and industrial buildings.

RATING: 12.5kA SINGLE PHASE TT

LPL I + II

SYSTEM: SINGLE PHASE TT

MDB: -

SDB: BOUNDARY of LPZ1 & LPZ2
(*if >50m away from MDB*)

LPL III + IV

SYSTEM: SINGLE PHASE TT

MDB: BOUNDARY of LPZ0 & LPZ1

SDB: BOUNDARY of LPZ1 & LPZ2
(*if >50m away from MDB*)




Standards

BS:EN 62305 (lightning protection) and EN 61643-11 (surge protection devices).

Electrical specification

Order number	KM1+2-12.5-1+1 SC
System	
Nominal voltage	U _n
Nominal voltage	U ₀
Maximum operating voltage L-N	U _c
Maximum operating voltage N-PE	U _c
Lightning impulse current (10/350μs) L-N	I _{imp}
Lightning impulse current (10/350μs) N-PE	I _{imp}
Nominal discharge current (8/20μs) L-N/N-PE	I _n
Maximum discharge current (8/20μs) L-N/N-PE	I _{max}
Voltage protection level at 5kA L-N	U _p
Voltage protection level L-N/N-PE/L-PE	U _p
Short-circuit current rating	I _{SCCR}
Maximum overcurrent protection	160A gL/gG
Response time L-N	t _a
Response time N-PE	t _a
Cross-section of connected conductors solid (min - max)	1mm ² - 35mm ²
Cross-section of connected conductors stranded (min - max)	1mm ² - 25mm ²
Fault indication L-N	Red indication field
Remote indication	Potential-free change-over contact
Remote indication contacts	250V/0.5A AC, 250V/0.1A DC
Cross-section of remote indication conductors	1.5mm ²
Degree of protection	IP20
Range of operating temperatures (min - max)	-40°C - +80°C
Mounting	DIN rail 35mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1, T2
Weight	250g (nett), 290g (gross)

Dimensions:

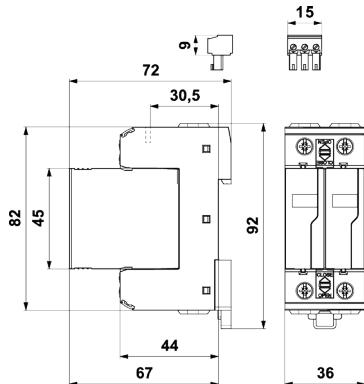

Wiring diagram:

