

DATASHEET

KINGSMILL
INDUSTRIES (U.K) LTD

PART NO: KM1+2-25-1+0 SC

TYPE: Type 1+2 lightning current and surge arrester

DESCRIPTION: High performance single pole Type 1+2 surge arrester. Use in TN-C system main distribution boards on the boundary of LPZ0 and LPZ1 and sub-distribution boards on the boundary of LPZ1 and LPZ2 (if >100m away from the MDB). Suitable for houses, commercial and industrial buildings.

RATING: 25kA SINGLE PHASE TN-C



LPL I + II

SYSTEM: SINGLE PHASE TN-C

MDB: BOUNDARY of LPZ0 & LPZ1

SDB: BOUNDARY of LPZ1 & LPZ2 (if >100m away from MDB)


Standards

BS:EN 62305 (lightning protection) and EN 61643-11 (surge protection devices).

Electrical specification

Order number	KM1+2-25-1+0 SC	
System	Single phase TN-C/1 pole	
Nominal voltage	U_n	230V AC
Nominal voltage	U_0	230V/400V AC ± 10%
Maximum operating voltage	U_c	260V AC
Nominal load current for "V" connection	I_L	125A
Lightning impulse current (10/350μs)	I_{imp}	25kA
Nominal discharge current (8/20μs)	I_n	30kA
Maximum discharge current (8/20μs)	I_{max}	60kA
Voltage protection level	U_p	1.5kV
Short-circuit current rating	I_{SCCR}	50kA
Maximum overcurrent protection		250A gL/gG
Maximum overcurrent protection for "V" connection		125A gL/gG
Response time	t_a	100ns
Cross-section of connected conductors solid (min - max)		2.5mm² - 50mm²
Cross-section of connected conductors stranded (min - max)		2.5mm² - 35mm²
Fault indication		Red indication field
Remote indication		Potential-free change-over contact
Remote indication contacts		250V/0.5A AC, 250V/0.1A DC
Cross-section of remote indication conductors		1.5mm²
Degree of protection		IP20
Range of operating temperatures (min - max)		-40°C - +80°C
Mounting		DIN rail 35mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1, T2	
Weight	335g (nett), 365g (gross)	

Dimensions:

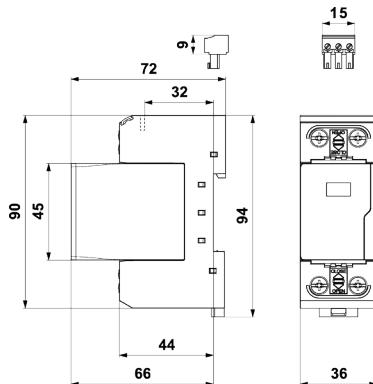

Wiring diagram:

