


## Flexible Flat Aluminium Braid Bonds

**Flexible Aluminium Braid Bonds** are used for bonding aluminium cladding into the structural Lightning Protection scheme.

DIMENSIONS (mm)	HOLE DIA. (A) (mm)	LENGTH (B) (mm)	CSA (mm <sup>2</sup> )	WEIGHT (kg)	PART NO.
30 x 5	M8	200	50	0.03	FBA200/50/9
30 x 5	M8	300	50	0.04	FBA300/50/9
30 x 5	M8	400	50	0.08	FBA400/50/9
30 x 5	M10	200	50	0.03	FBA200/50/11
30 x 5	M10	300	50	0.04	FBA300/50/11
30 x 5	M10	400	50	0.08	FBA400/50/11
32 x 6	M8	200	75	0.06	FBA200/75/9
32 x 6	M8	300	75	0.09	FBA300/75/9
32 x 6	M8	400	75	0.12	FBA400/75/9
32 x 6	M10	200	75	0.06	FBA200/75/11
32 x 6	M10	300	75	0.09	FBA300/75/11
32 x 6	M10	400	75	0.12	FBA400/75/11

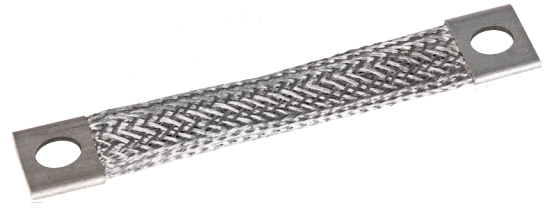

**Material:** Aluminium  
**Standard:** BS:EN 13602

**FIXINGS**  
 Use M8 or M10 galvanised nuts, bolts and washers

**SEE FIXINGS SECTION PAGE FIX:2**

**OTHER MATERIALS, SIZES AND CONFIGURATIONS AVAILABLE UPON REQUEST.**

