
## Single Pipe/Handrail Bracket

The **Single Pipe/Handrail Bracket** is manufactured from stainless steel and is used in conjunction with **Cable Holders** having an M8 or M16 threaded insert and **Mast Holders** having M16 threaded inserts.

## Brackets for use with Cable Holders and accessories with M8 fixings


BAND DIAMETER (ØE) (mm)	THREADED STUD	WEIGHT (kg)	PART NO.
150 - 300	M8 x 25mm	0.18	KM97700105
≤150	M8 x 25mm	0.16	KM97700205
300 - 500	M8 x 25mm	0.21	KM97700305

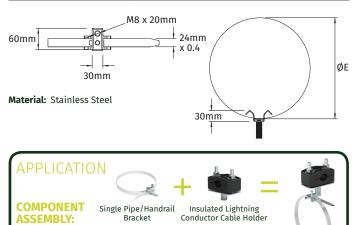

Single Pipe/Handrail Bracket with M8 fixings are used in conjunction with Insulated Lightning Conductor Cable Holders having an M8 threaded insert.

## Brackets for use with Mast Holders and accessories with M16 fixings

BAND DIAMETER (ØE) (mm)	THREADED STUD	WEIGHT (kg)	PART NO.
150 - 300	M16 x 50mm	0.23	KM97701105
≤150	M16 x 50mm	0.21	KM97701205
300 - 500	M16 x 50mm	0.26	KM97701305



COMPONENT Single Pipe/Handrail Insulated Lightning
ASSEMBLY: Bracket Conductor Mast

Holder Single Pipe/Handrail Bracket with M16 fixings are used in conjunction with Insulated Lightning Conductor Mast Holders having an M16 threaded insert.

